


ROTOR Deburring machine Orbital

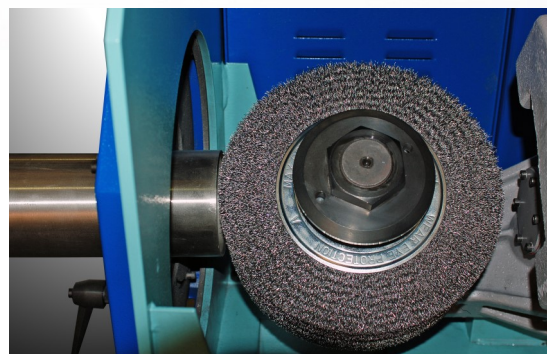

Technical features:

Min./max square parts size	10 / 148 mm.
Min./max. round parts diam.	10 / 210 mm.
Brush wheel diameter	250 mm.
Brush rotation motor	3,0 kw.
Orbital brush rotation motor	0,55 kw.
Net weight	650 kg.
Dimensions	80x116xh.135 cm.

Description:

Machine for removing INSIDE and OUTSIDE “burrs and sharp edges” on extremities of parts subject to cutting processes. Is also possible to “deburr” round and oval tubes, square and rectangular sections, irregular profiles made of iron, steel, stainless steel, aluminium and plastic materials.

Standard Equipment:

- Motors voltage 400V 50Hz;
- Adjustable universal workpieces holder;
- Adjustment wrenches;
- Instruction book;
- CE conformity certificate;

Basic machine price:


ROTOR Deburring machine for extremities

Safety devices according to CE rules

0,00

SET: Equipment on request

Qty	Code	Description	X	€ur	Price
1	G15.2	Adjustable brush rotation speed with inverter (800-2000 rpm.)			
1	G15PF.	Frontplate for irregular shape parts (instead of standard frontplate mounted on the machine)			
1	36E03	Brush Dia.250 or 250 mm. with nylon thread			
1	36E02	Brush dia.250 double Stainless Steel wire 0,35mm			
1	36E01	Brush Dia.250 mm. Steel wire 0,35mm			

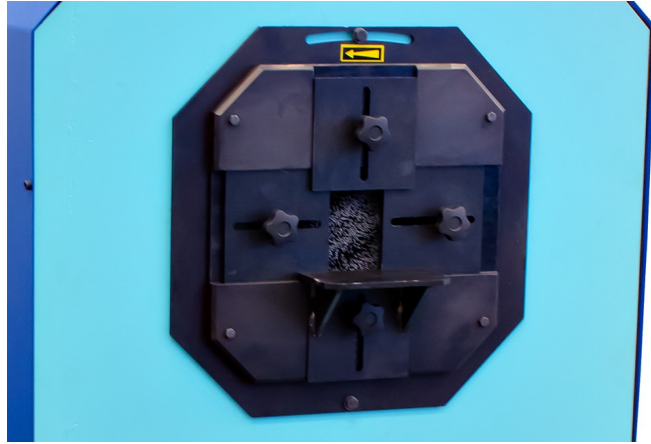

Sales terms:

Delivery time	10 days
Delivery	AKES Showroom Istanbul
Packing	Free wooden pallet
VAT	-
Payment	-



Abdi İpekçi Cad.Çizmeci İşMerkezi.No:87/107
Bayrampaşa-ISTANBUL-TURKEI
Tel: +90212 576 25 37 Fax: +90212 549 43 62
Mobile / WhatsApp: +90212 618 07 90
www.akes.com.tr